INSTRUCTIONS

50A CONNECTOR COVER TV-201426-50

CONTENTS

- 1x LED Connector Cover Assembly
- 4x Stainless Steel Screws
- Front and Rear weather Seals A, B, C
- Locking Tab Device
- **50A Connectors Sold Separately**

WARNING

Read instructions carefully before installing

WIRING INSTRUCTIONS

It is recommended that an authorised personnel conduct the installation

1. To assemble, solder or crimp wiring with LED, positive RED and negative BLACK leads to the 50 Amp Power Connector contacts.
2. Place the wired connector into the bottom of the cover ensuring the rubber seals are inserted. Then screw on the top cover lid ensuring all seals are inserted.
3. Install the cover assembly securely with the 4 stainless steel screws provided.
4. Push the supplied locking tab into the mating connector. The front cover will clamp down on the locking tab of the mating connector preventing both connectors from separating.

   NOTE Red power LED (6-30V DC) indicates active battery power is present in the connector

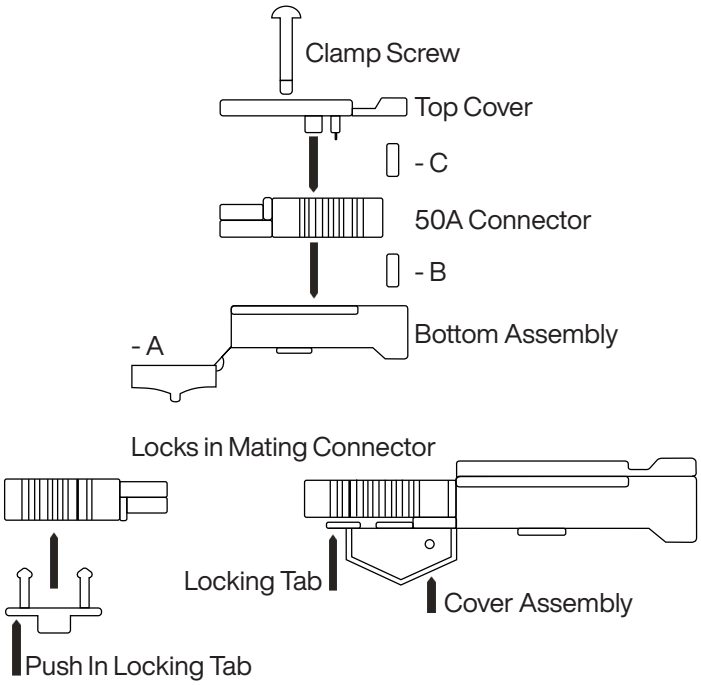

TECHNICAL ASSISTANCE

T 02 6645 2722
E mail@trailervision.com.au
W trailervision.com.au

271 River Street
MACLEAN, NSW, 2463

Data subject to change, visit our website for up to date information